

Hydraulic Demolition Shears

HP Series

For carriers from 2 to 13 tons



HP Series Primary Demolition Shears

- 3 models for excavators with operating weight from 2 to 13 tons
- Pressure intensifier HP BOOSTER
- Compact-designed 360° rotation
- Fully-protected cylinder
- High power levels
- Lower fuel consumption
- Optimal use of the carrying machine
- Interchangeable blades
- Synchronic jaw-moving system
- Fast working cycles
- Optimal power weight




Hydraulic Demolition Shears - HP Series

For dimensions and specifications, see the back of this page.



Hydraulic Demolition Shears - HP Series

Specifications and Dimensions

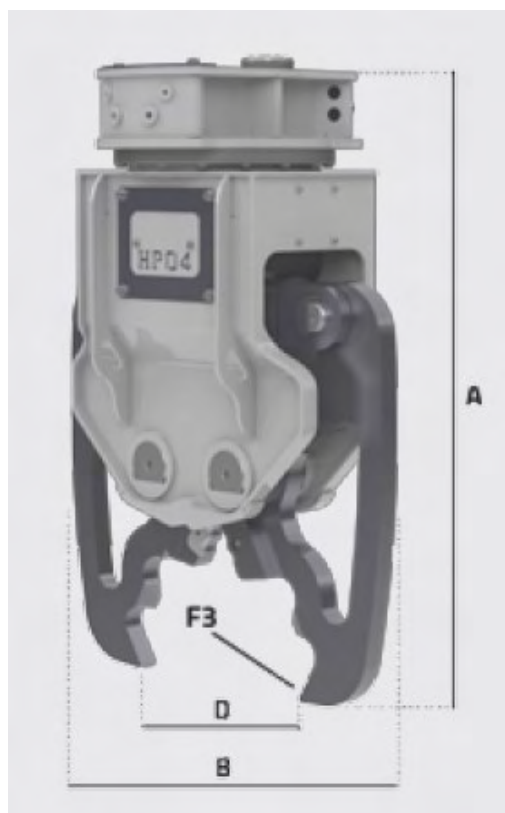

MODEL		HP02	HP04	HP07
A	mm	1127	1290	1510
B	mm	745	910	1075
D	mm	350	485	550
Steel blade length	mm	85	85	150
F3	t	30	35	50
Rotation	°	360	360	360
Rotation Flow	l/min	5 / 8	5 / 8	5 / 8
Rotation Pressure	bar	120	120	120
Open/Close Flow	l/min	50	70	90
Op/Cl Pressure	bar	200	200	200
Weight	kg	300	440	740
Excavator Weight	t	2 / 5	4 / 8	7 / 13
	mm	15	15	20

TRAMAC reserves the right to change or discontinue models and/or specifications without prior notice.

Quality and dependability: two features you can count on with every TRAMAC product.

All TRAMAC products are engineered for superior performance, manufactured to the most exacting specifications, and—within the guidelines of the industry's most rigid quality control program—thoroughly inspected at every stage of production. All working parts are precision-machined to the closest tolerances, and all materials meet or exceed the highest industry standards. These are but a few of the many vital reasons major contractors worldwide choose our products.

They know that with TRAMAC, reliability is crucial; a basic component conscientiously built into every unit that bears our name.



Canada: 3421 Industriel Blvd / Laval, QC / H7L 4S3 / 1-888-663-8122 / 450-663-8122 / FAX 450-663-6797
 1711 Rte de l'Aéroport #4 / L'Ancienne Lorette, Qc / G2G 2P4 / 418-877-5557 / FAX 450-877-1886
 1-28 Steve Fonyo Dr. / Kingston, On / K7M 8N9 / 613-542-1500 / FAX 613-542-1505
 e-mail: tramac@tramac.com <http://www.tramac.com>