

Hydraulic Demolition Shears

PD Series

For carriers from 1,5 to 130 tons



PD Series Hydraulic Demolition Shears

The perfect equipment for primary demolition, especially designed to demolish a building.

With 11 standard models, Tramac offers the most complete range of demolition shears to use on excavators from 1,5 up to 130 tons.

Compact and easy to handle, reliable and safe, this demolition shear stands out for its versatility and extremely high productivity based on precision cutting.

Each PD Series model is standard equipped with hydraulic 360° rotation, however for simpler operation on mini-excavators, the PD 02M and PD 03M models are also available with mechanical rotation.




Hydraulic Demolition Shears - PD Series

For dimensions and specifications, see the back of this page.



Hydraulic Demolition Shears - PD Series

Specifications and Dimensions

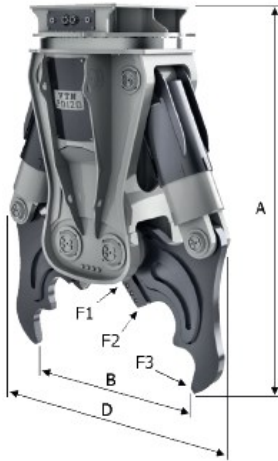

KIT

"PD" INTERCHANGEABLE KIT "PD" INTERCHANGEABLE BLADES KIT



Model		PD01	PD02M	PD02	PD03M	PD03	PD10	PD15	PD19	PD22	PD25	PD30	PD80	PD120
A	mm	908	1036	1036	1291	1291	1528	1722	2050	2171	2250	2319	3200	3620
B	mm	230	350	350	480	480	600	720	847	900	1130	1203	1850	2100
D	mm	621	609	609	873	873	1136	1172	1465	1470	1470	1795	2640	2680
Steel blade length	mm	84	84	84	150	150	150	200	200	252	252	300	310	310
F1	t	75	80	80	125	125	160	185	230	260	320	330	740	810
F2	t	37	45	45	70	70	90	115	140	160	190	200	320	360
F3	t	22	25	25	45	45	60	75	92	105	125	130	190	235
Rotation	°	360	360 M	360	360 M	360	360	360	360	360	360	360	360	360
Rotation Flow	l/min	8 / 15	/	5 / 8	/	5 / 8	25 / 35	25 / 35	25 / 35	25 / 35	25 / 35	25 / 35	80 / 100	80 / 100
Rotation Pressure	bar	180/220	/	120	/	120	190	190	190	190	190	190	160	160
Open/Close Flow	l/min	20 / 25	30 / 40	30 / 40	40 / 70	40 / 70	70 / 90	110/140	170/210	200/250	250/300	300/350	450/700	600/1000
Op/Cl Pressure	bar	220	220/300	220/300	220/300	220/300	350	350	350	350	350	350	350	350
Weight	kg	185	255	265	470	480	820	1140	2000	2150	2700	3400	8400	11000
Excavator Weight	t	1,5/3	2/5	2/5	4/9	4/9	9/13	13/20	20/26	22/30	27/35	33/50	70/100	80/130
	mm	15	15	15	15	15	15	20	30	30	35	40	55	70

TRAMAC reserves the right to change or discontinue models and/or specifications without prior notice.

Quality and dependability: two features you can count on with every TRAMAC product.

All TRAMAC products are engineered for superior performance, manufactured to the most exacting specifications, and—within the guidelines of the industry's most rigid quality control program—thoroughly inspected at every stage of production. All working parts are precision-machined to the closest tolerances, and all materials meet or exceed the highest industry standards. These are but a few of the many vital reasons major contractors worldwide choose our products.

They know that with TRAMAC, reliability is crucial; a basic component conscientiously built into every unit that bears our name.



Canada: 3421 Industriel Blvd / Laval, QC / H7L 4S3 / 1-888-663-8122 / 450-663-8122 / FAX 450-663-6797
 1711 Rte de l'Aéroport #4 / L'Ancienne Lorette, Qc / G2G 2P4 / 418-877-5557 / FAX 450-877-1886
 1-28 Steve Fonyo Dr. / Kingston, On / K7M 8N9 / 613-542-1500 / FAX 613-542-1505
 e-mail: tramac@tramac.com <http://www.tramac.com>