



The Gantry Crane Series


Portable and Adjustable Height : Their installation is fast and simple, easily assembled and adjusted to various heights. Adjusted by inserting a push/pull pin.

Cost Savings: Depending on the environment and application, gantry cranes can sometimes provide the same material handling capabilities as a comparable bridge crane system, but with a significant cost savings.

Robust Construction: The heavy duty frame design with heavy gauge square tubing uprights, legs and braces provides stable lifting and movement.

Tested Design: Offering greater stability allowing the I-beam to pivot independently and to self center over a load.


Wheels: Are equipped with swivel casters and brakes.

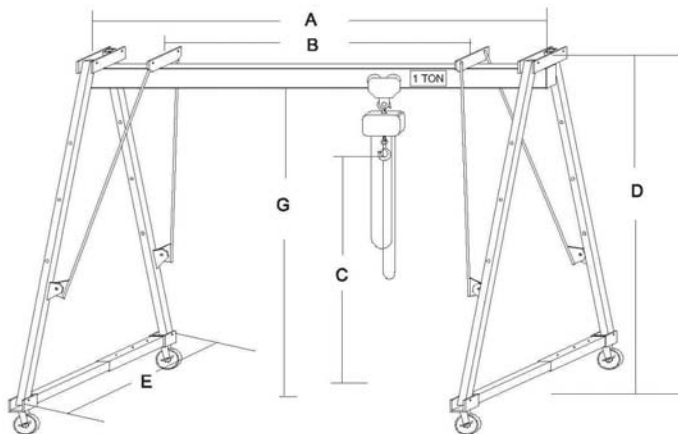

Chain blocks & Trolleys available

All gantries c/w swivel casters & breaks

- 1 Ton models have 6" phenolic casters
- 2 Ton models have 6" cast iron casters
- 3 Ton models have 8" cast iron casters



GANTRY CRANE SPECIFICATIONS

| MODEL | CAP./ LBS. | Over all Span A | Clear Span B | Hook lift Min./Max. C | Over all Height D | Beam Height | Wheel Spread E | Beam Width F | Height under the beam G | Beam No. | Shipping Weight lbs |
|----------|------------|-----------------|--------------|-----------------------|-------------------|-------------|----------------|--------------|-------------------------|----------|---------------------|
| PG-20-10 | 2,000 | 10' | 4'7" | 6'6 1/2"/12'4 1/2" | 8'9"/14'7" | 6" | 4'7" / 7' | 3 3/8" | 7'11 1/2"/13'9 1/2" | S6@12.5 | 885 |
| PG-20-15 | 2,000 | 15' | 9'7" | 6'4 1/2"/12'2 1/2" | 8'9"/14'7" | 8" | 4'7" / 7' | 4" | 7'9 1/2"/13'7 1/2" | S8@18.4 | 1050 |
| PG-40-10 | 4,000 | 10' | 4'7" | 6'4 1/2"/12'2 1/2" | 8'9"/14'7" | 8" | 4'7" / 7' | 4" | 7'9 1/2"/13'7 1/2" | S8@18.4 | 1165 |
| PG-40-15 | 4,000 | 15' | 9'7" | 5'10 1/2"/11'8 1/2" | 8'9"/14'7" | 10" | 4'7" / 7' | 4 5/8" | 7'7 1/2"/13'5 1/2" | S10@25.4 | 1370 |
| PG-60-10 | 6,000 | 10' | 4'7" | 5'9" / 11'7" | 8'9"/14'9" | 10" | 4'10" / 7'3" | 4 5/8" | 7'9" / 13'7" | S10@25.4 | 1430 |
| PG-60-15 | 6,000 | 15' | 9'7" | 5'9" / 11'7" | 8'9"/14'9" | 10" | 4'10" / 7'3" | 4 5/8" | 7'9" / 13'7" | S10@25.4 | 1615 |

If your capacities are not shown with our standard designs, custom designs can be engineered to satisfy specific needs.